


Belgotex



Terranova

The Story
Behind Terranova

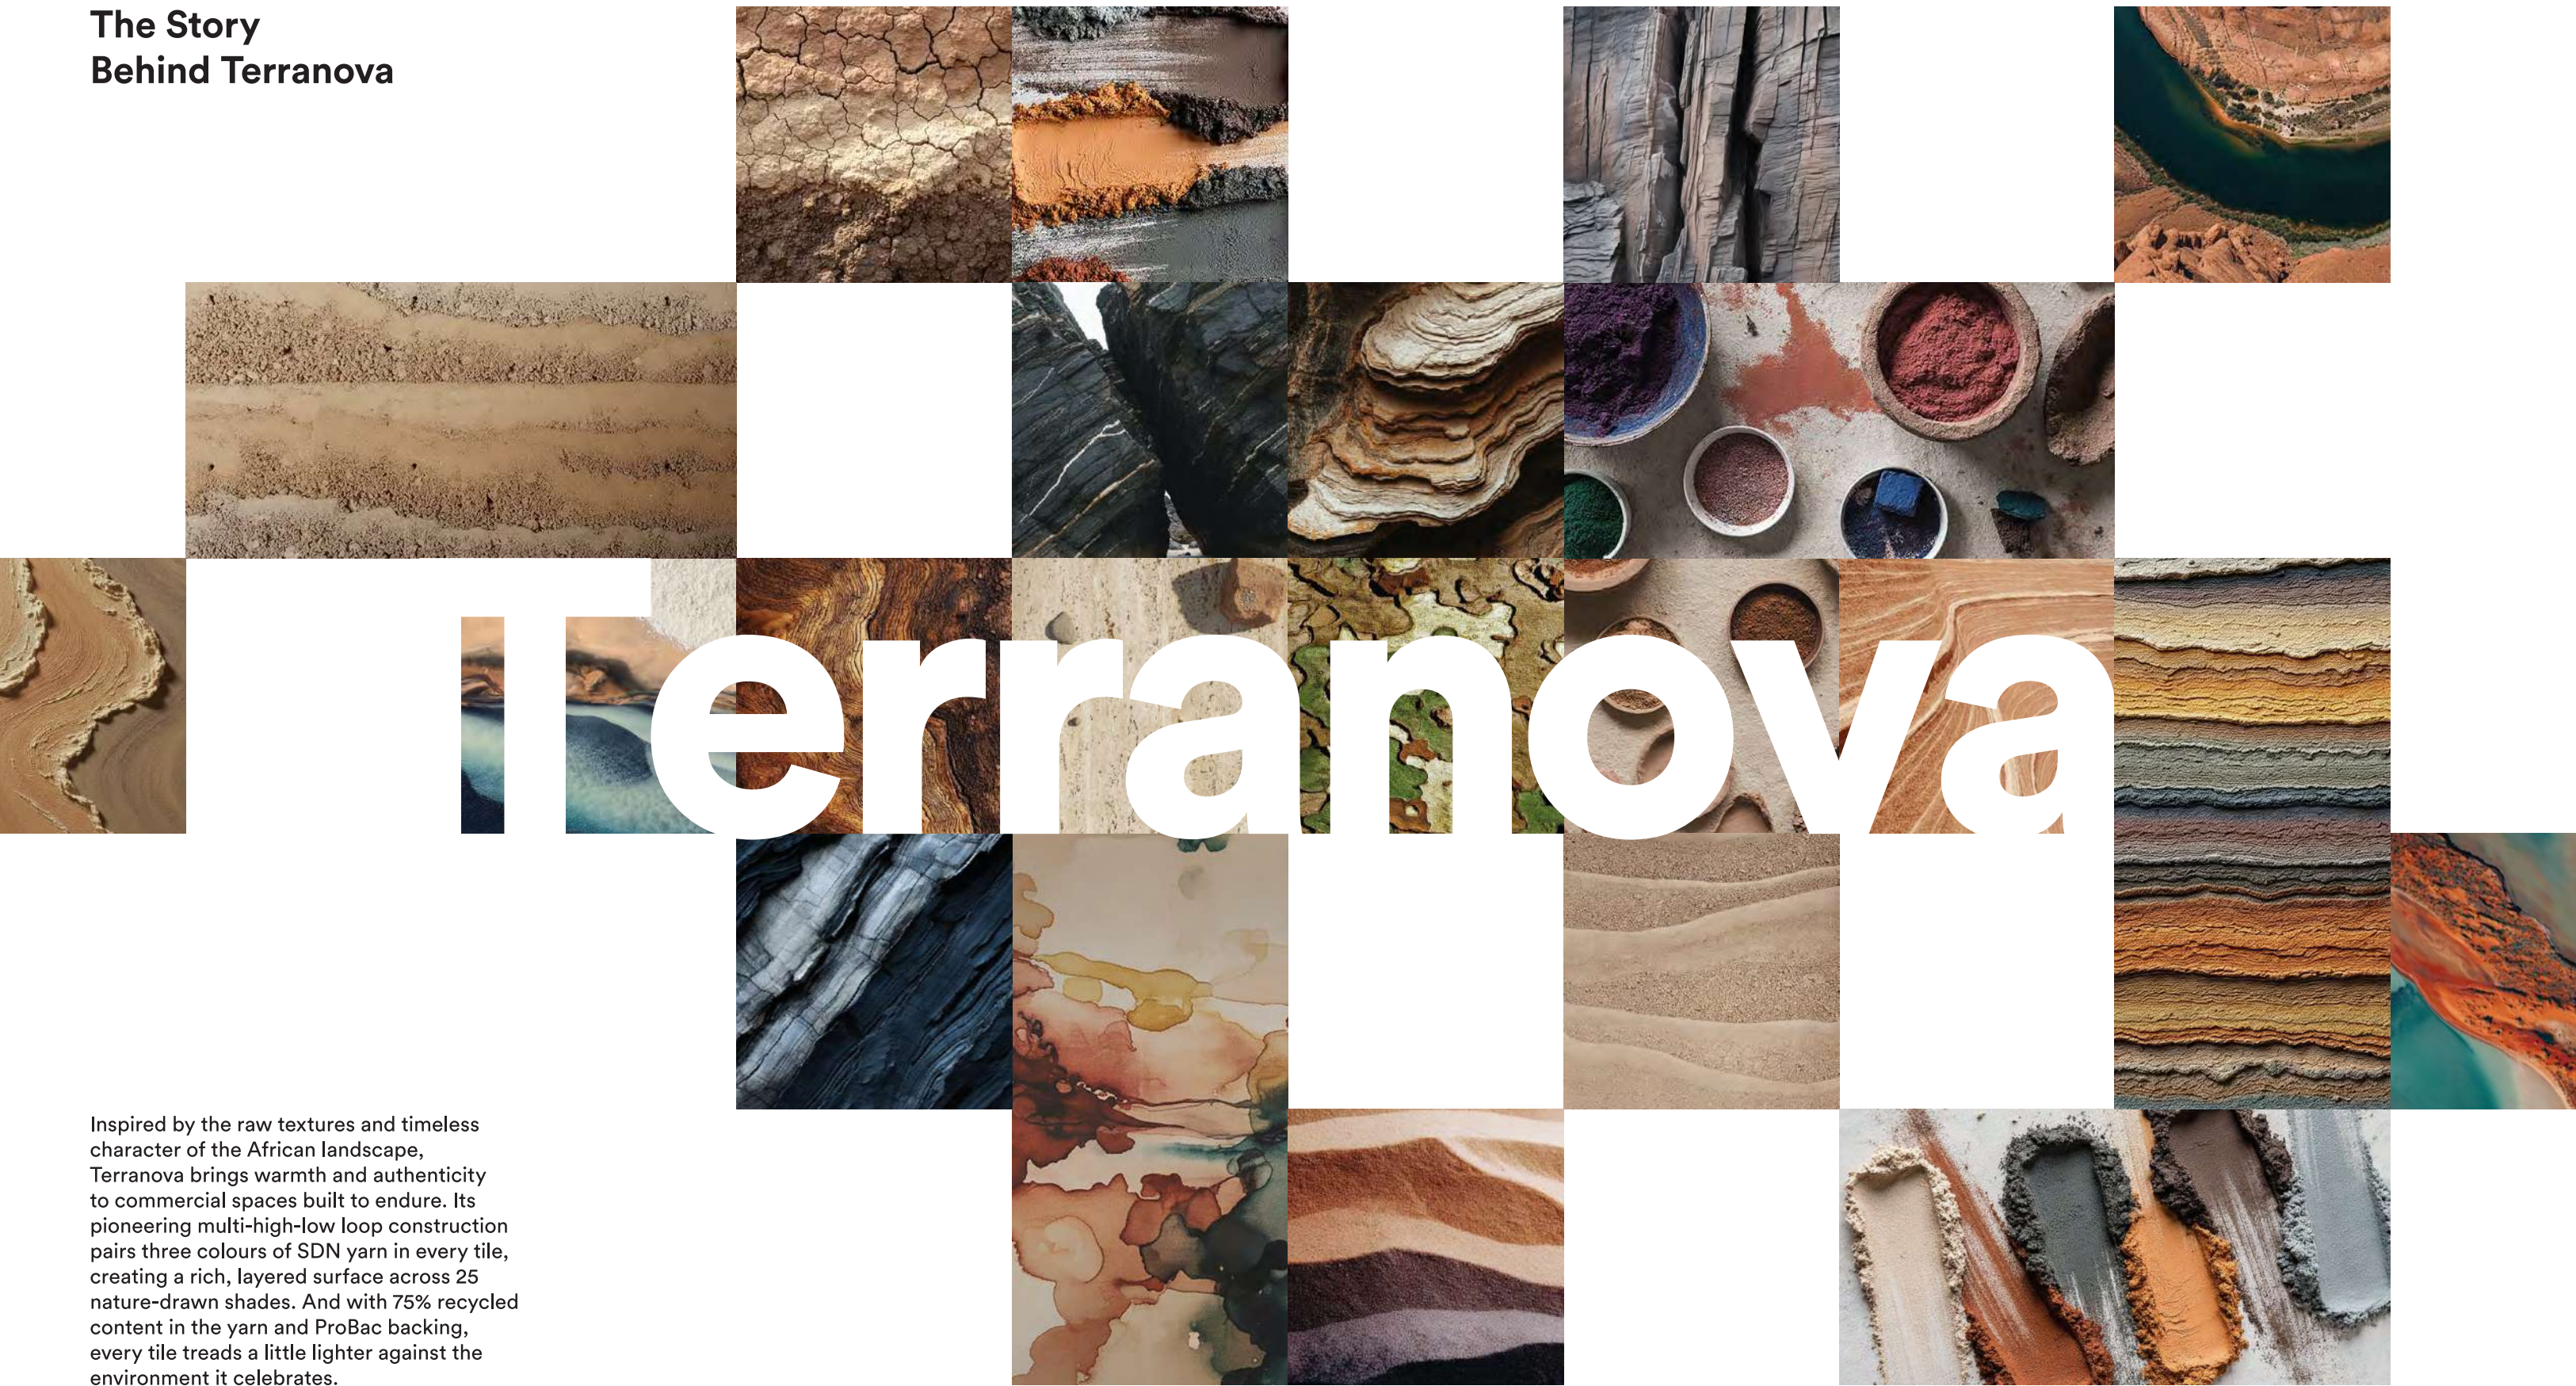

Inspired by the raw textures and timeless character of the African landscape, Terranova brings warmth and authenticity to commercial spaces built to endure. Its pioneering multi-high-low loop construction pairs three colours of SDN yarn in every tile, creating a rich, layered surface across 25 nature-drawn shades. And with 75% recycled content in the yarn and ProBac backing, every tile treads a little lighter against the environment it celebrates.



Goldstone | Stone Creek




Red Jasper



Cobalt Stream



Spring Prairie | Babbling Brook

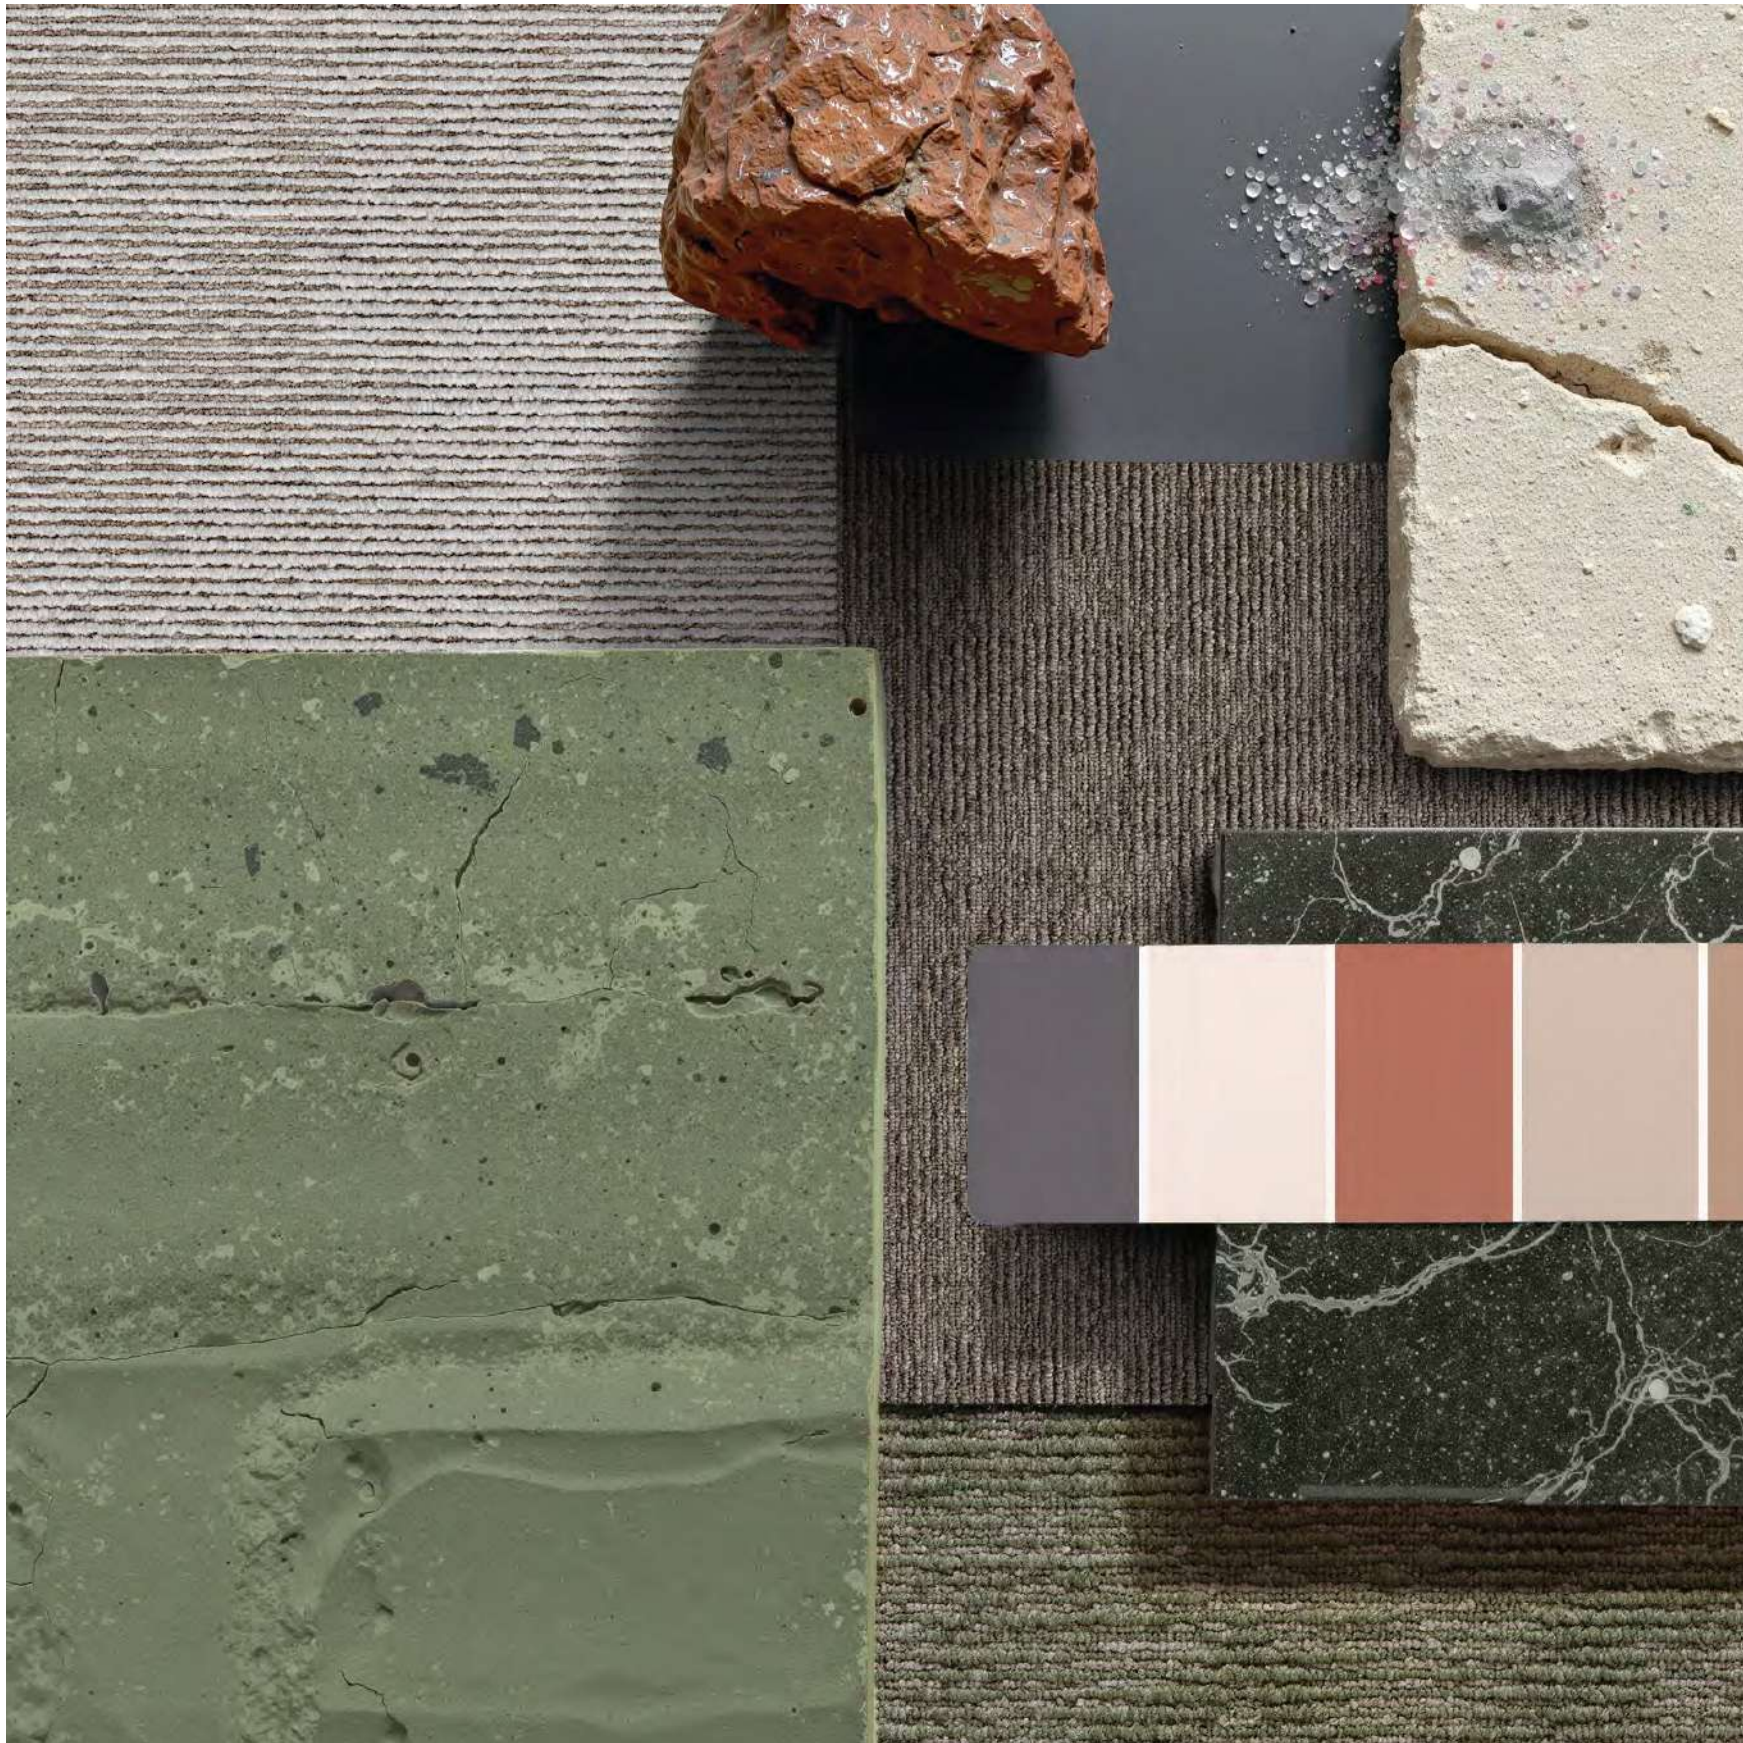


Spring Prairie | Earth Tone | Stone Creek



Lake Blue | Willow Brook



Terranova Moodboard





Dusk Birch | Aged Bark



Rusty Grove | Bloodstone




Terranova

Colourways

Terranova takes its cues from the mineral-rich soils and layered terrain of the African earth, offering 25 colours drawn from nature’s own pigments. The multi-high-low loop construction weaves three tones of SDN yarn into every tile, echoing the rugged complexity underfoot and producing a surface rich in texture and visual depth. Each colourway has been carefully curated to bring warmth, tonal character, and an honest sense of place into commercial interiors.

ProBac is a next-generation carpet backing that replaces traditional bitumen with a lighter, more sustainable system made from 75% recycled polyester. It reduces environmental impact while improving performance – offering easier installation, greater durability, and a quieter underfoot experience. More than an upgrade, it’s a complete rethink of carpet backing for modern commercial spaces.

Installation Methods

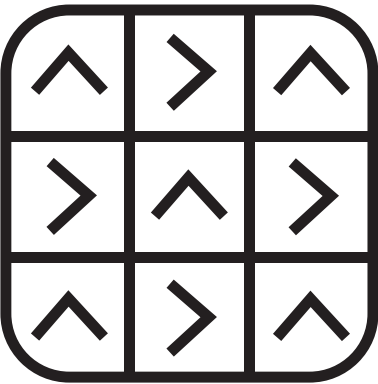

Tessellated
Dynamic and balanced. Perfect for subtle pattern and texture.

Tufted Tile Installation Disclaimer

All Belgotex tufted tile products are supplied with an installation direction fitting guide. There are many ways to create designs and textures with tufted tiles. These textures are achieved by varying the pile heights of the yarns. When tiles with different heights are installed in the same direction, the joins may create a noticeable “zipper effect” - this is not a manufacturing defect. Belgotex recommends moving tiles around during installation to minimise this effect or any texture variation. It is also recommended that all tufted tiles be laid in a tessellation pattern (90° / quarter turn) for optimal visual consistency.




Agate Stone



Aged Bark



Aqualine

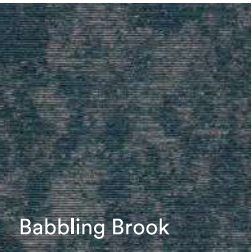


Babbling Brook



Bloodstone



Blue Lustre



Cobalt Stream



Dusk Birch



Earth Tone



Goldstone



Lake Blue



Lapis



Lichen Mist



Magnesite



Mossy Peat



Red Jasper



Rose Quartz




Rusty Grove




Silver Fern



Spring Prarie




Stone Creek



Willow Brook



Forest Walk



Amazonite



Orange Calcite

Product Specifications

Technical Specifications to EN 1307

Construction:	(ISO 2424)	Tufted Hi Low Infinity Loop Pile
Fibre Type:	(ISO 2424)	100% Stainproof SDX (Solution Dyed Nylon)
Primary Backing	(ISO 2424)	Nonwoven Polyester
Secondary Backing	(ISO 2424)	ProBac - Polyester Felt
Fibre Mass:	(ISO 8543)	±660 g/m² 19.50 oz/yd²
Total Thickness:	(ISO 1765)	±7.7 mm - 8.8 mm 0.303 inch - 0.346 inch
Total Mass:	(ISO 8543)	±2666 g/m² 78.63 oz/yd²
Effective Pile Mass:	(ISO 8543)	±409 g/m² 12 oz/yd²
Pile Density:	(ISO 8543)	±0.091 g/cm³ - 0.120 g/cm³ 2452 oz/yd³ - 3236 oz/yd³
Number of Tufts:	(ISO 1763)	±216000 m² 258333.85 yd²
Standard Dimension:	(EN ISO24342)	50 cm x 50 cm 19.69 inch x 19.69 inch
Use Classification:	(EN 1307)	33 - Heavy Commercial
Fire Classification:	(EN 13501/ASTM R 648-08)	Bfls1/Class 1

Colour Fastness		
Light:	(NF EN ISO 105-B02)	>6.0
Water:	(ISO 105-E01)	4-5
Rubbing (Dry):	(ISO 105-X12)	4-5
Rubbing (Wet):	(ISO 105-X12)	4-5
Electrostatic Propensity:	(ISO 6356)	≤2.0 kV
Sound Absorption:	(EN ISO 354)	aw: 0.25
Sound Insulation:	(EN ISO 10140)	Δ Lw 27 db
Thermal Resistance:	(ISO 8302)	0.1283 m² K/W
Dimensional Stability:	(ISO 986)	Shrinkage ≤0.4% / Extension ≤0.2% in both directions
VOC Test:	(ISO 10580/ASTM D5116)	Passed
Castor Chair Suitability:	(NF EN 985)	A: Intensive Use
Staircase Suitability:	(NF EN ISO 12951)	B: Occasional Use

Product Disclaimer

Product characteristic may vary due to the nature of manufacturing. To combat colour variance do not install more than one dye lot in a single colour tile installation. Where different dye lots and products are mixed and matched then size variations could take place, and tiles might need to be altered during installation. If you are installing multiple colours in a random pattern, mixing dye lots together won't be a problem. Sample swatches have been cut from an overall design; therefore, the design and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance. During installation of this product there could be visible tile joins due to texture and design, this is not a manufacturing fault, tiles need to be moved around the in the installation.

© Belgotex Floorcoverings (Pty) Ltd. All rights reserved.


Belgotex



Founded over 40 years ago in South Africa, Belgotex has grown into Africa’s leading manufacturer of carpets and artificial grass, with a global footprint. We design, make, and distribute high-quality broadloom and modular tiles for residential, commercial and hospitality spaces.

Our commitment to sustainability is embedded in every step of our process. Guided by circular design principles and aligned with the Science Based Targets initiative (SBTi), we continuously innovate to reduce our environmental impact.

As South Africa’s first flooring manufacturer to earn a Custom Industrial 6 Green Star rating and a “Level A” Global GreenTag certification, our products are eligible for GBCSA credits – demonstrating our dedication to responsible manufacturing and environmental leadership.

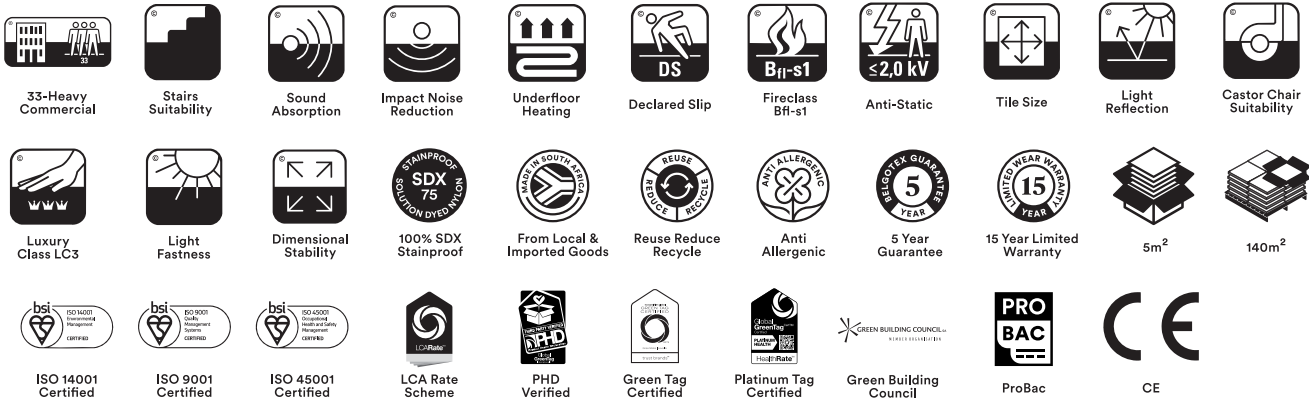

belgotex.co.za

B.