




SPC Flooring 石塑地板

Wood • Stone 木 • 石


Crestique 舍意

Boutique life.


CW6006

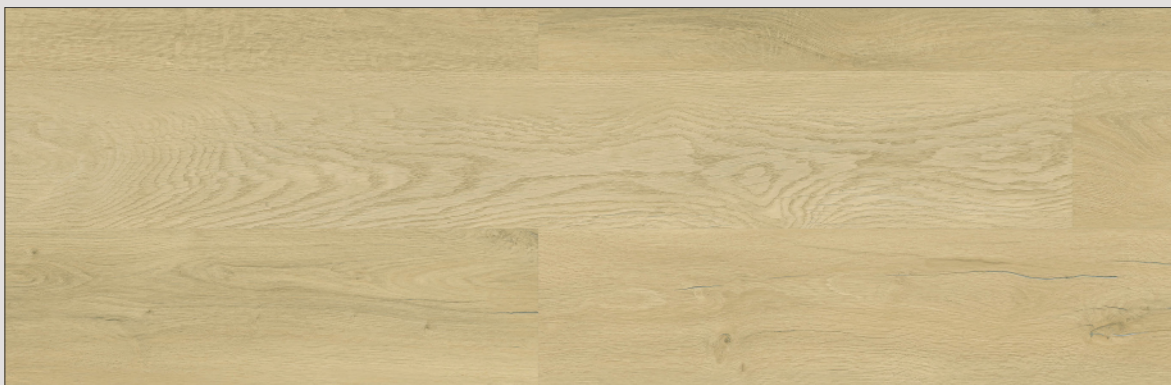

CW6010

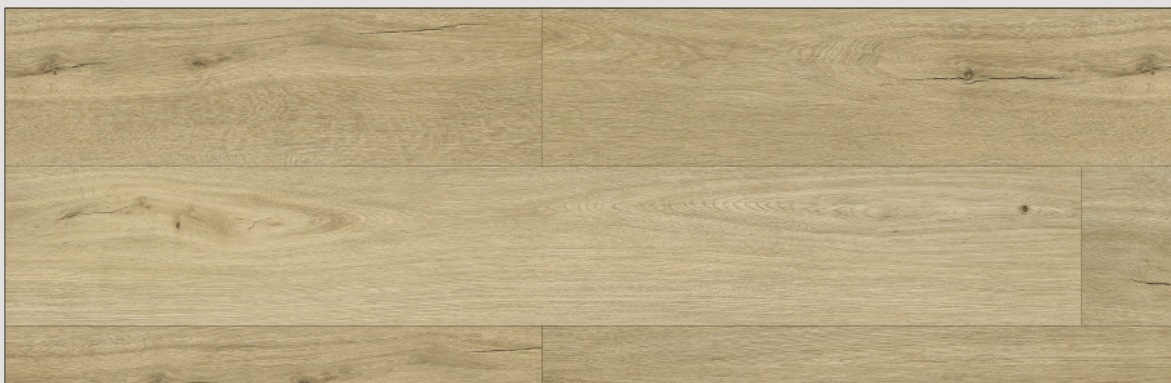

CW6011

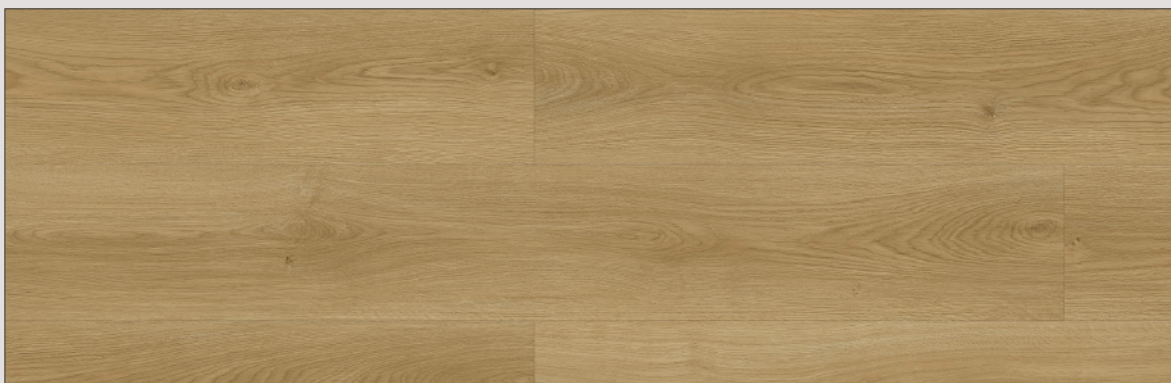

CW6006




CW6010




CW6011

CW6001

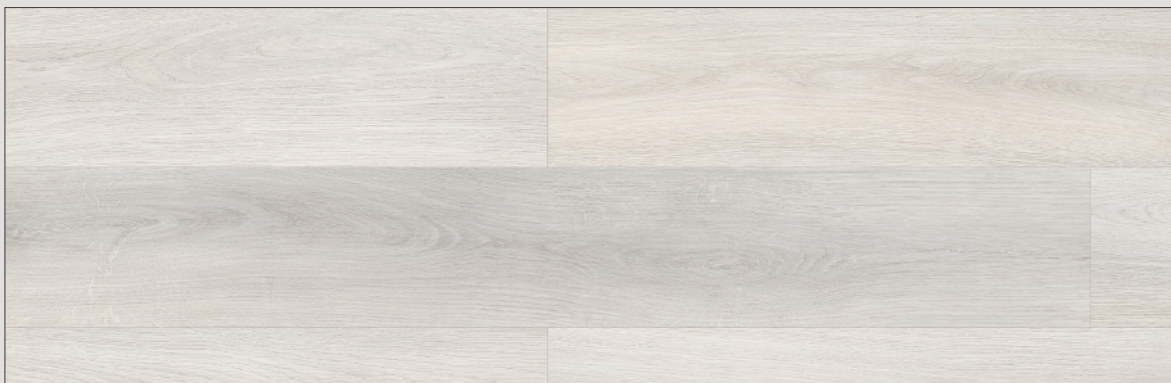

CW6002

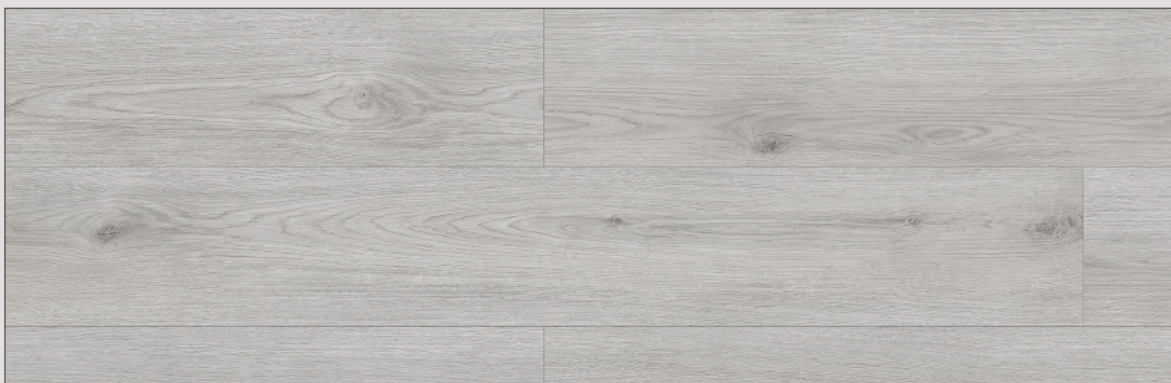

CW6003



CW6001



CW6002




CW6003




CW2007



CS8002

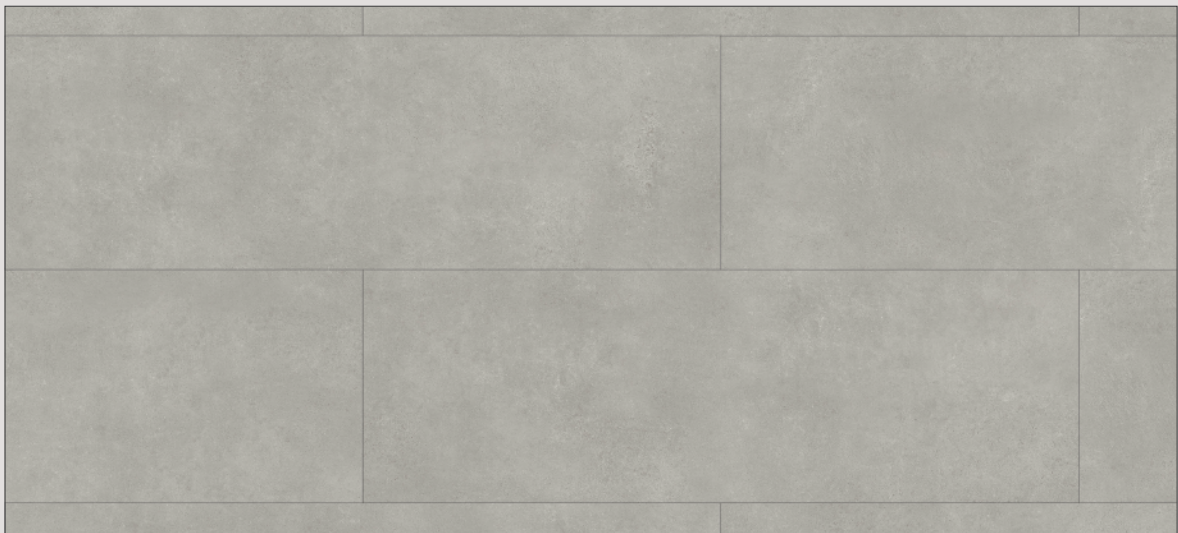

CS6018

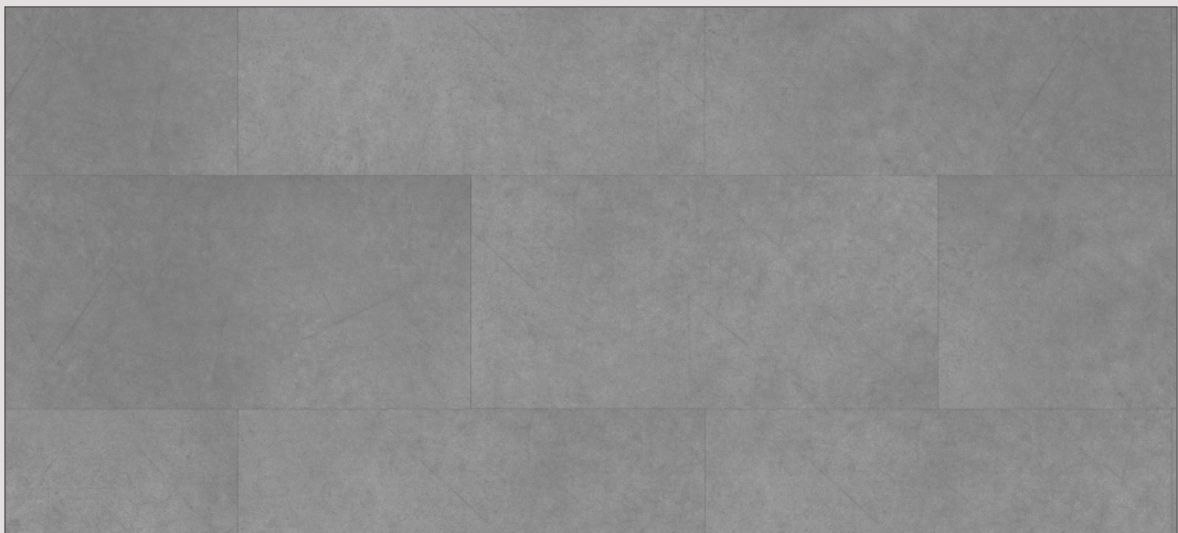

CW2007



CS8002



CS6018



Product Information

Tile	Size	Thickness	Wearlayer
Wood	180mm x 1220mm	5mm SPC + 1.5mm IXPE	0.3mm
Stone	305mm x 935mm	5mm SPC + 1.5mm IXPE	0.3mm

Performance Requirements	Standard	Result
Micro-scratch resistance	EN 16094	MSR-B2
Squareness	ISO 24342:2018	Max≤0.15mm
Straightness	ISO 24342:2018	Max≤0.2mm
Classification	ISO 10582	23, 31/33, 42/34, 43
Dimensional stability	ISO 23999:2021	≤0.12%
Curling after exposure to heat	ISO 23999:2021	≤1.0mm
Residual indentation	ISO 24343-1:2007	≤0.10mm
Colour fastness	ISO 105-B02:Method 3	≥6
Fire resistance	EN 13501-1	Bfl-SI
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN 660-2	Group T
Peel resistance	ISO 24345:2006	≥75N/50mm
Staining and chemical resistance	ISO 26987:2008	No change in surface dulling, surface attack or staining was detected
Castor chair	ISO 4918:2016	After 25000 cycles, test specimens no visible damage
Heavy metal	ASTM F963-11	Free
Formaldehyde emission	EN 717-1:2004	Free
Utilization	-	Recyclable

